




# DOCTOR CHARGE 130 230V 12V/24V

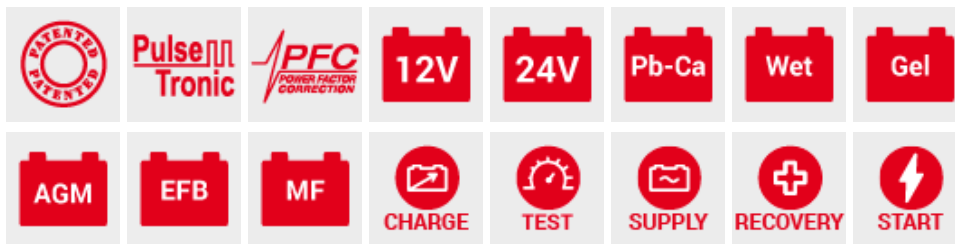

## Overview

### DOCTOR CHARGE 130 230V 12V/24V

cod. 807590

Electronic BATTERY MANAGER for total maintenance of WET, GEL, AGM, MF, SPIRAL, START-STOP batteries at 12/24V and for support activities when intervening on vehicles in workshops, repair shops and car dealer premises.

The innovative Power Stream technology guarantees better performance, up to 50% more than traditional battery chargers. The Pulse Tronic technology guarantees optimal battery charging over 8 phases.

Doctor Charge 130 carries out 5 functions:

1. automatic charge and maintenance of batteries with PULSE TRONIC technology, even in difficult environmental conditions (low temperatures);
2. battery tests such as voltage at terminals, starting capacity (CCA) and operational check of the vehicle alternator;
3. recovery of sulphated or very discharged batteries, and recovery of optimal operation with periodic regeneration;
4. stable power supply source for battery changes (to protect the on-board electronics), for diagnostic activities (operation checks carried out on the vehicles), for keeping the batteries of display vehicles in showrooms operational;
5. vehicles start.

Based on the SMPS (Switch Mode Power Supply) Technology. In case of black-outs or repetitive uses Doctor Charge 130 can set itself at the last settings carried out. Many protections available.

Fit with PFC device.



1 PH 230V



MOTORCYCLE



CAR



BOAT



TRACTOR



SMALL VAN



EXCAVATOR



VAN



CE MARKING



## DOCTOR CHARGE 130 230V 12V/24V



EAC CERTIFICATION

### Technical data

<b>CODE</b>	CODE 807590	<b>V<sub>1PH</sub></b>	SINGLE PHASE MAINS VOLTAGE 230 V	<b>F</b>	MAINS FREQUENCY 50 - 60 Hz
<b>P<sub>CHARGE</sub></b>	CHARGE POWER 1,8 KW	<b>P<sub>START</sub></b>	START POWER 2 KW	<b>BATTERY</b>	CHARGING VOLTAGE 12 / 24 V
<b>A<sub>EFF</sub></b>	EFFECTIVE CHARGING CURRENT 140 / 70 A	<b>A<sub>EN</sub></b>	RATED CHARGE CURR. EN60335-2-29 120 / 60 A	<b>A<sub>1V/C</sub></b>	START CURRENT 1V/C EN60335-2-29 180 A
<b>C<sub>MIN</sub></b>	MIN. RATED REFERENCE CAPACITY 20 Ah	<b>C<sub>MAX</sub></b>	MAX RATED REFERENCE CAPACITY 1200 Ah	<b>SUN</b>	ADJUSTMENT POSITIONS 7
<b>W/H/L</b>	DIMENSIONS 20 - 26 - 34 cm	<b>kg</b>	WEIGHT 6 kg	<b>BAR CODE</b>	EAN CODE 800489796651 9
<b>PALLET</b>	PIECES/PALLET 30 pz/pallet	<b>PALLET</b>	PIECES/PALLET - B 24 pz/pallet - B		

### Included Accessories

P/N. CABLES + CLAMPS 3 M - 125000