


TopSolar Zonnepanelen



top systems

Lemstraak 6 | 2411 NC Bodegraven, The Netherlands
Tel. +31 (0)172 650 737 | info@top.systems | www.top.systems

TopSolar Zonnepanelen

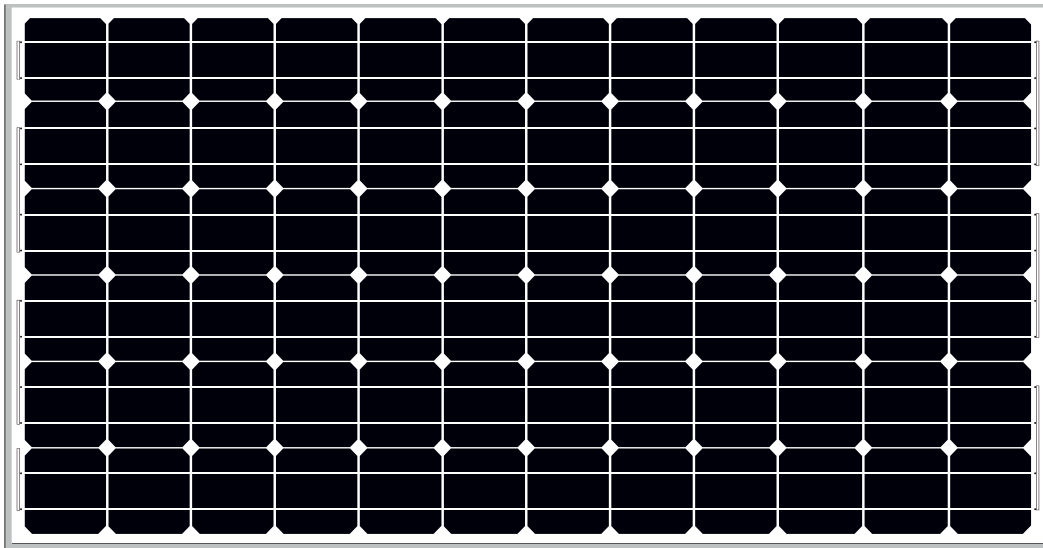

	TOP Solar 60 Wp Mono	TOP Solar 110 Wp Mono	TOP Solar 170 Wp Mono	TOP Solar 210 Wp Mono
Model Number	SOLAR5001000	SOLAR5001001	SOLAR5001002	SOLAR5001003
Rated Maximum Power (Pmax)	60 W	110 W	170 W	210 W
Output Tolerance	0~3%	0~3%	0~3%	0~3%
Current Pmax (Imp)	3,48 A	6,41 A	9,74 A	6,07 A
Voltage Pmax (Vmp)	17,26 V	17,18 V	17,46 V	34,62 V
Short-Circuit Current (Isc)	3,61 A	6,65 A	10,15 A	6,31 A
Open-Circuit Voltage (Voc)	22,18 V	22,11 V	22,32 V	44,36 V
Nominal Operating Cell Temp	-40 °C to 85 °C	-40 °C to 85 °C	-40 °C to 85 °C	-40 °C to 85 °C
Weight	4,2 Kg	8,0 Kg	12 Kg	15 Kg
Dimensions (LxWxH)	630x545x25	1195x545x35 mm	1480x673x35 mm	1580x808x35 mm
Maximum System Voltage	1000 VDC	1000 VDC	1000 VDC	1000 VDC
Maximum Series Fuse Rating	15 A	15 A	15 A	15 A
Cell Technology	Mono-Crystalline	Mono-Crystalline	Mono-Crystalline	Mono-Crystalline
Application Class A	Tier 1	Tier 1	Tier 1	Tier 1

Technical data at standard test conditions AM=1.5 E=1000W/m² Tc=25 °C