

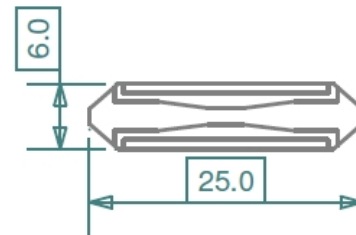


### F2000 ceramicOTO 6x25 fuse series

- DIN 72581-1 standard
- Zn fusing element material
- Thermo plastic body material

iMaXX ref.	Color	Rating [A]	Voltage [V]
F2005	Yellow	5	32
F2008	White	8	32
F2016	Red	16	32
F2025	Blue	25	32
F2040	Black	40	32



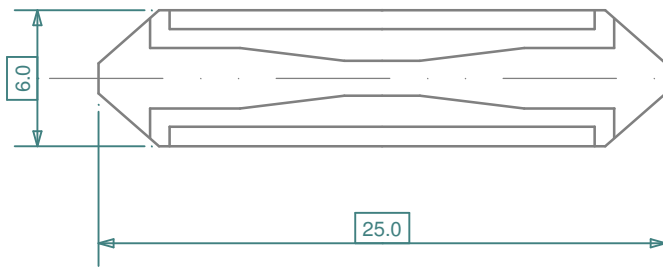

Rating [ A ]	Color	Volt [ V ]	iMaXX Reference
5	Yellow	32	F2005
8	White	32	F2008
16	Red	32	F2016
25	Blue	32	F2025
40	Black	32	F2040 **


\*\*) F2040 Black 40A not in standard DIN 72581-1

Fusing time DIN 72581-1 [s]		
Load [%]	Minimum [s]	Maximum [s]
150 %	3,600	-
250 %	-	60

Notes
Thermo plastic body material
Zn fusing element material
Range from 5A up to 25A, DIN 72581-1
40A version (not in DIN 72581-1) also available

Revisions			Drawn	Date	Appr.
a	06/02	add 40A	Checked	2/99	
b	07/07	re-drawn	Standards	2/99	
			Approved	2/99	AdH



		Scale	3 : 1	Title	F2000 series, ceramicOTO fuse
		Projection		Drawing type	schematic
		Tolerance	± 0.5 mm unless otherwise noted	Drawing number	F2000 drawing 1
				Sheet	1 of 1
				Layers	0 1 2 6 8 9 10