





Specs

DC/AC MOBILE SYSTEMS

POWER 2,3 & 3,6 KW
CAPACITY 1280 to 3640 Wh

DC/AC MOBILE SYSTEMS

POWER 2,3 & 3,6 KW
CAPACITY 1280 to 3640 Wh

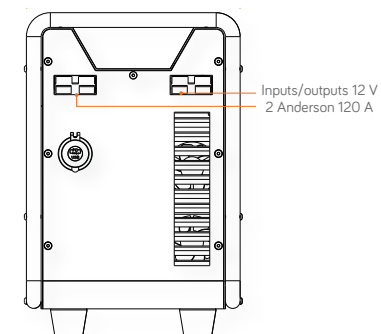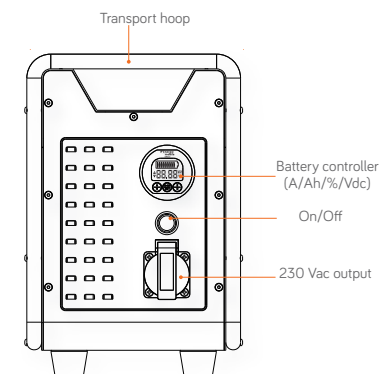


- 1 x 230 V / 12 V lithium battery charger for recharging the E-GEN from the 230 V mains supply
- 2 x Grey Anderson 120 A sockets
- 2 x Terminals for 120 A Anderson sockets (for 25-35 mm² cable)
- 2 x Terminals for 120 A Anderson plug (for 16 mm² cable)

INCLUDED




	E-GEN2000	E-GEN3000	E-GEN3600
Nominal 230 V power /peak	2000 W / 4000 W	3000 W / 6000 W	3600 W / 7200 W
Energy capacity	100 Ah / 1280 Wh	150 Ah / 1920 Wh	300 Ah / 3640 Wh
AGM equivalent	200 Ah	300 Ah	600 Ah
Cycling life	6000 cycles at 50 % - 4000 cycles at 80 % - 2500 at 100%		
Battery controller	A / Ah / V / %		
Connectors	230 V Anderson	1 x 230 V socket 2 x 120 A	2 x 230 V socket
Enclosure protection	IP34		
Dimensions L x l x h	425 x 235 x 345 mm	475 x 235 x 345 mm	475 x 290 x 365 mm
Weight	22,7 Kg	29,4 Kg	45 Kg
Standard	CE		

E-GEN LITHIUM




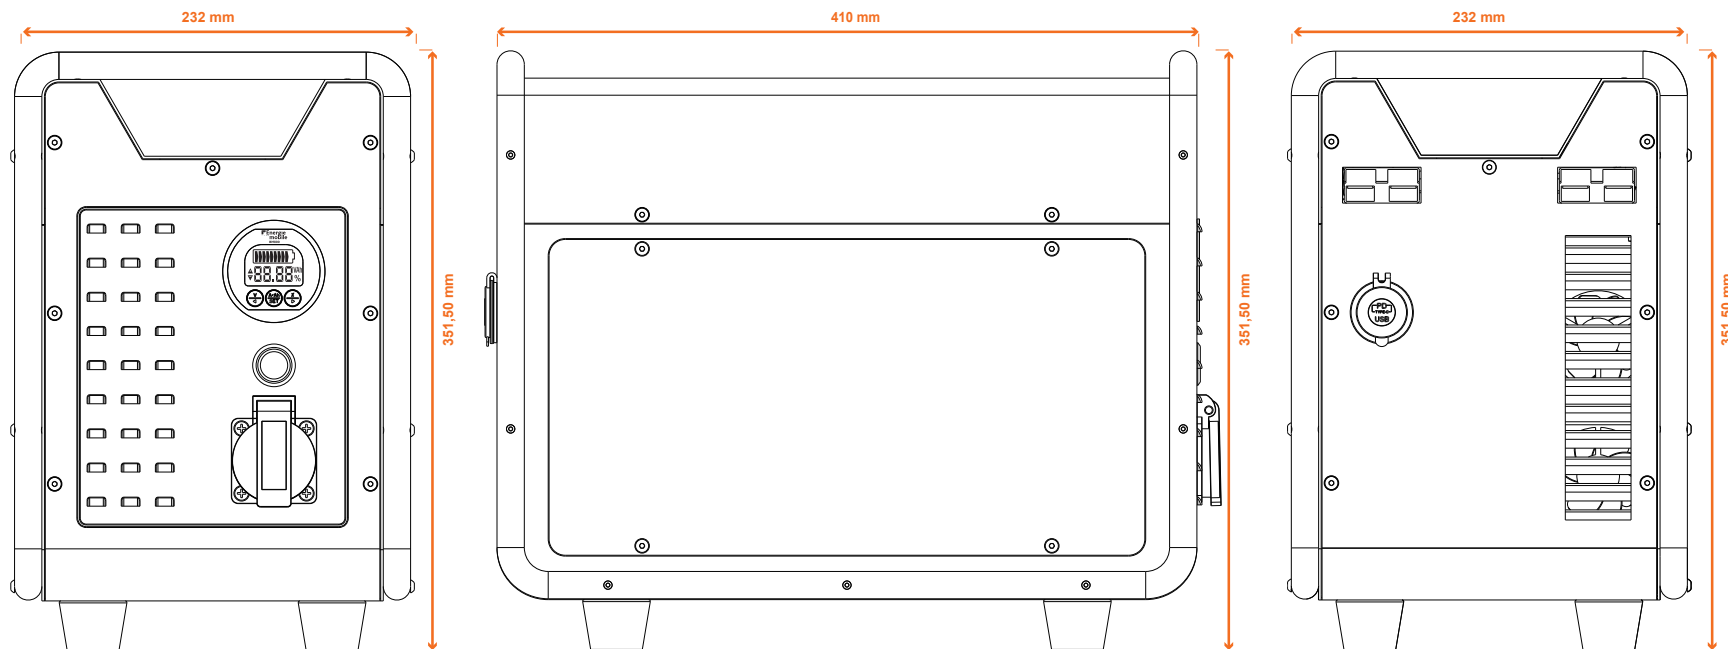


E-GEN 2000

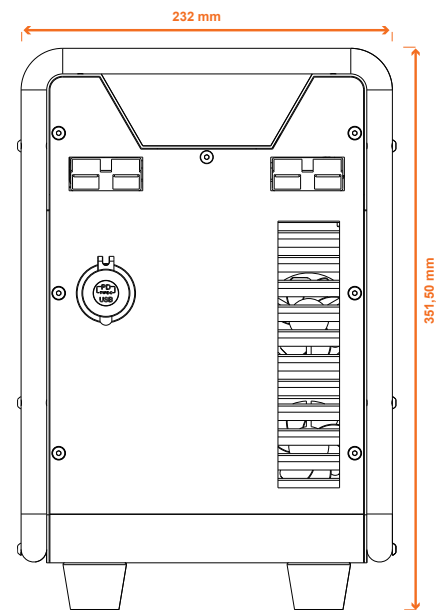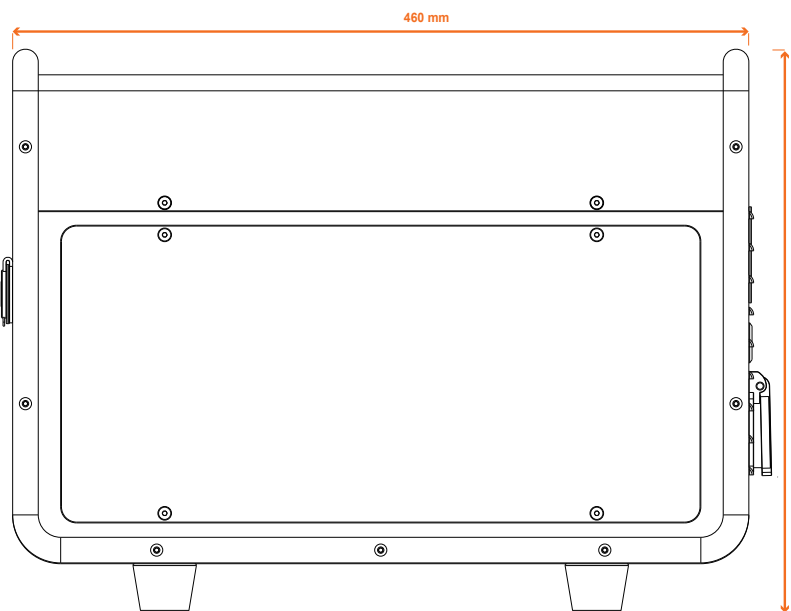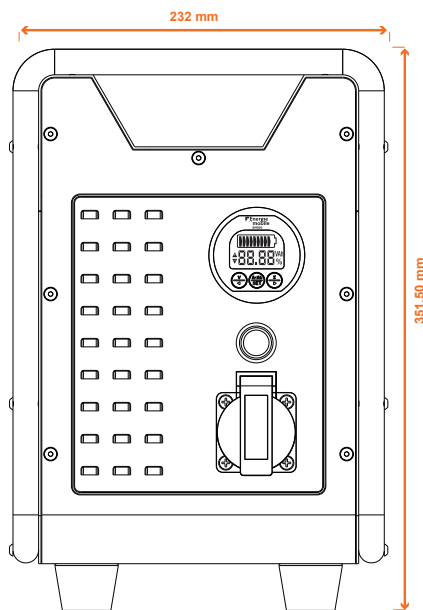

E-GEN 3000

ASSEMBLY-TYPE OF CHARGER SUPPLIED

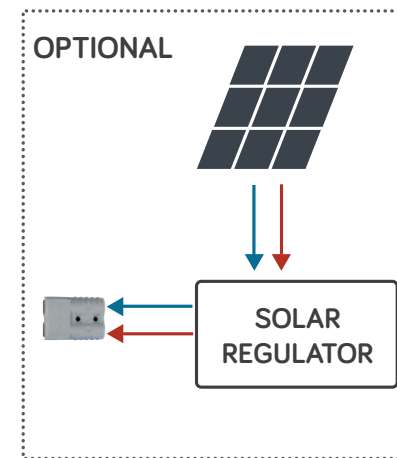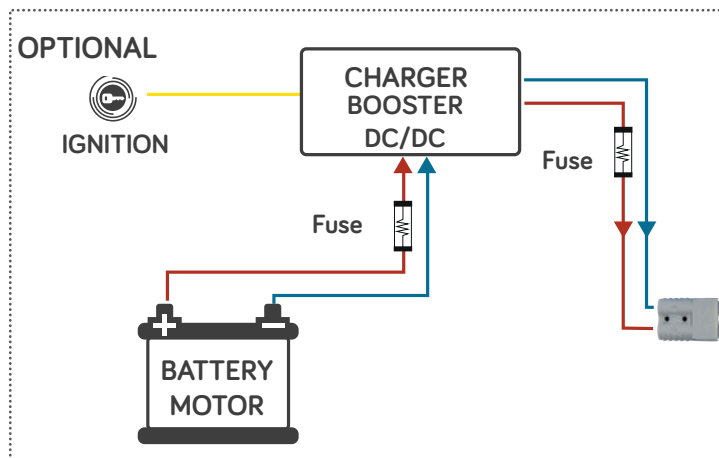

WIEGEL
TRANSPORT EQUIPMENT


MOTION


ENERGY


VISIBILITY


SUPPORT

Carolus Clusiuslaan 3
2215 RV Voorhout - NL

Tel.: +31 88 7865300
Email: nl@wiegel.eu

Antwerpsesteenweg 144
2950 Kapellen - BE

Tel.: +32 3 355 1100
Email: be@wiegel.eu

Herrenpfad-Süd 30
41334 Nettetal - DE

Tel.: +49 2157 1260381
Email: de@wiegel.eu

Company of **Stokvis Group** 